

# Document made available under the Patent Cooperation Treaty (PCT)

International application number: PCT/SG04/000392

International filing date: 01 December 2004 (01.12.2004)

Document type: Certified copy of priority document

Document details: Country/Office: MY  
Number: PI 20034609  
Filing date: 02 December 2003 (02.12.2003)

Date of receipt at the International Bureau: 15 March 2005 (15.03.2005)

Remark: Priority document submitted or transmitted to the International Bureau in compliance with Rule 17.1(a) or (b)



World Intellectual Property Organization (WIPO) - Geneva, Switzerland  
Organisation Mondiale de la Propriété Intellectuelle (OMPI) - Genève, Suisse



**Perbadanan Harta Intelek Malaysia**  
**Intellectual Property Corporation of Malaysia**

Aras 27, 30 dan 32, Menara Dayabumi, Jalan Sultan Hishamuddin, 50623 Kuala Lumpur, Malaysia.  
Tel: 603-2274 2100 Fax: 603-2274 1332 Website: [www.mipc.gov.my](http://www.mipc.gov.my)

To:

**P. KANDIAH**


KANDIAH & ASSOCIATES SDN. BHD.  
Suite 8 - 7 -2, Menara Mutiara Bangsar  
Jalan Liku, Off Jalan Bangsar,  
59100 Kuala Lumpur  
**MALAYSIA**

**PATENT APPLICATION NO: PI 2003 4609**

This is to certify that annexed hereto is a true copy from the records of the Registry of Trade Marks and Patents, Malaysia of the application as originally filed which is identified therein.

By authority of the  
REGISTRAR OF PATENTS

**ROZANAH MISKAN**  
(CERTIFYING OFFICER)  
30-Dec-2004  
[rozanah@mipc.gov.my](mailto:rozanah@mipc.gov.my)  
Tel: 03-22748970

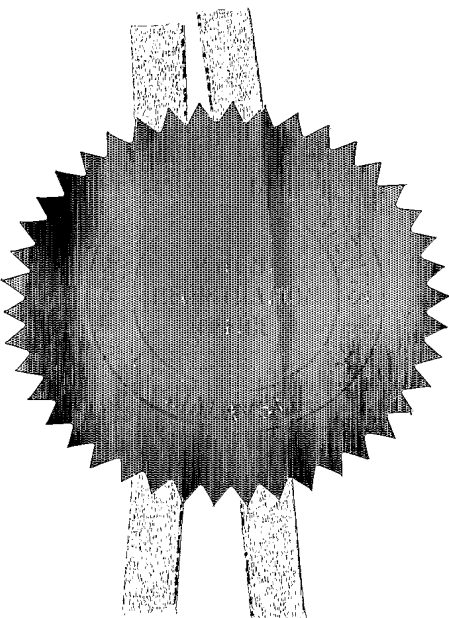



**Perbadanan Harta Intelek Malaysia**  
**Intellectual Property Corporation of Malaysia**

Aras 27, 30 dan 32, Menara Dayabumi, Jalan Sultan Hishamuddin, 50623 Kuala Lumpur, Malaysia  
Tel : 603-2274 2100 Fax : 603-2274 1332 Website : www.mipc.gov.my


---

**CERTIFICATE OF FILING**

**APPLICANT** : MULTIMEDIA GLORY SDN. BHD.  
**APPLICATION NO** : PI 20034609  
**REQUEST RECEIVED ON** : 02/12/2003  
**FILING DATE** : 02/12/2003  
**AGENT'S/APPLICANT'S FILE REF.** : PK/P939/MG/2002

Please find attached, a copy of the Request Form relating to the above application, with the filing date and application number marked thereon in accordance with Regulation 25(1).

**Date** : 19/12/2003

  
.....  
**(MOHD. AMRAN ABAS)**  
**for Registrar of Patents**

**To** : P. KANDIAH  
C/O KANDIAH & ASSOCIATES SDN BHD,  
SUITE 8-7-2,  
MENARA MUTIARA BANGSAR,  
JALAN LIKU,  
OFF JALAN BANGSAR,  
59100 KUALA LUMPUR,  
MALAYSIA

**Patents Form No. 1**  
**PATENTS ACT 1983**

**REQUEST FOR GRANT OF PATENT**  
(Regulation 7(1))

To: The Registrar of Patents  
Patent Registration Office  
Kuala Lumpur  
Malaysia

**For Official Use**

APPLICATION NO: **PK/P939/MG/2002**  
APPLICATION RECEIVED ON: **02-12-2003**

Fee received on: **02-12-2003**

Amount: **RM 340**

\*Cheque / Postal Order / Money Order / Draft /  
Cash No.: **BEB 273092**

Please submit this Form in duplicate together  
with the prescribed fee.

Applicant's file reference: PK/P939/MG/2002

THE APPLICANT(S) REQUEST(S) THE GRANT OF A PATENT IN RESPECT OF THE  
FOLLOWING PARTICULARS:

TITLE OF INVENTION:

**A METHOD AND SYSTEM TO ELECTRONICALLY IDENTIFY  
AND VERIFY AND INDIVIDUAL PRESENTING HIMSELF FOR  
SUCH IDENTIFICATION AND VERIFICATION**

II. APPLICANT(S) (the data concerning each applicant must appear in this box or, if the space  
is sufficient, in the space below)

Name: **MULTIMEDIA GLORY SDN. BHD.**

H.S.C./Passport No:

Address: **144, 1<sup>st</sup> Floor, Jalan Tun Sambanthan  
Brickfields, 50470 Kuala Lumpur**

Address for service in Malaysia: **Suite 8-7-2  
Menara Mutiara Bangsar  
Jalan Riong, Bangsar  
59100 Kuala Lumpur  
Tel: 2284 7872 Fax: 2284 1125**

Nationality: **A Company Established under the Laws  
of Malaysia.**

- Permanent residence or principal place of business:


**AS ABOVE**

Telephone Number  
(if any)

**2284 7872**

Fax Number  
(if any)  
**2284 1125**

Additional Information (if any)

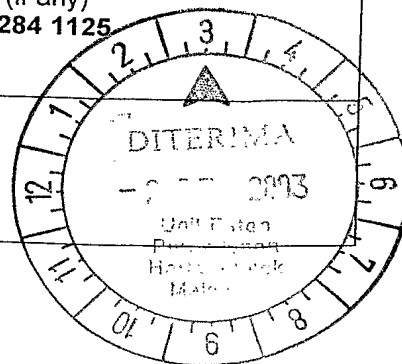

**20034609**

III. INVENTOR

Applicant is the inventor:

Yes ☐

No ☒

If the applicant is not the inventor:

Name of the inventors: **KARTIK KALEEDHASS S/O V.S. KALIDAS**  
**Passport No : E 2038840 (Indian Passport)**  
**( A Citizen of India)**

Address of inventors:

**19, USJ 26B, 47600 Subang Jaya, Selangor, Malaysia.**

A statement justifying the applicant's right to the patent accompanies this Form:

Yes ☒

No ☐

Additional Information (if any)

IV. AGENT OR REPRESENTATIVE:

Applicant has appointed a patent agent in accompanying Form No. 17. (to follow)

Yes ☐

No ☐

Agent's Registration No:

**PA 90/019**

Applicants have appointed **P. Kandiah** to be their common representative

IV. DIVISIONAL APPLICATION

This application is a divisional application

Yes ☐

No ☐

The benefit of the


Filing date

Priority date

Of the initial application is claimed in as much as the subject matter of the present application is contained in the initial application identified below: -

Initial Application No:

Date of filing of initial application:

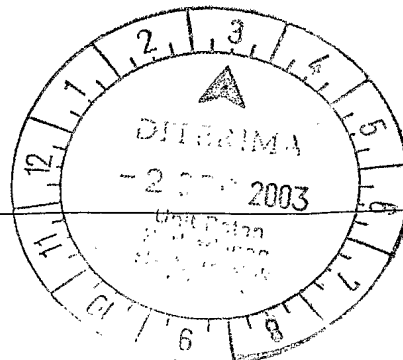

20034609

VI. DISCLOSURES TO BE DISREGARDED FOR PRIOR ART PURPOSES

Additional information is contained in supplemental box:

- (a) Disclosure was due to acts of applicant or his predecessor in title

Date of disclosure:

- (b) Disclosure was due to abuse of rights of applicant or his predecessor in title

Date of disclosure:

A statement specifying in more detail the facts concerning the disclosure accompanies this Form

Yes

No

Additional Information (if any)

VII. PRIORITY CLAIM (if any)

The priority of an earlier application is claimed as follows :

Country (if the earlier application is a regional or international application, indicate the office with which it is filed):

Filing Date:

Application No:

Symbol of the International Patent Classification:

If not yet allocated, please tick

The priority of more than one earlier application is claimed:

Yes

No


The certified copy of the earlier application(s) accompanies this Form:

Yes

No

If No, it will be furnished by (if requested by Registrar)

Additional Information (if any) :

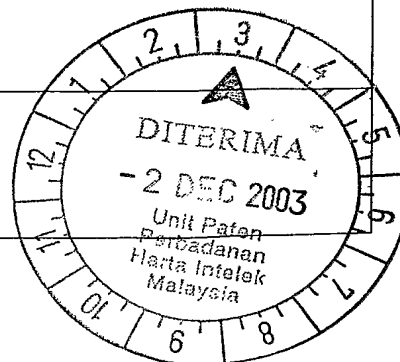

20034609

# VIII. CHECK LIST

A. This application contains the following:

1.	Request	1	Sheets
2.	Description	28	Sheets
3.	Claim	6	Sheets
4.	Abstract	1	Sheets
5.	Drawing	3	Sheets
	Total	39	Sheets

B. This Form, as filed, is accompanied by the items checked below : (Please tick where appropriate) :

- |     |  |                                     |
|-----|--|-------------------------------------|
| (a) | signed Form No. 17   | <input type="checkbox"/>            |
| (b) | declaration that inventor does not wish to be named in the patent                            | <input type="checkbox"/>            |
| (c) | statement justifying applicant's right to the patent   | <input checked="" type="checkbox"/> |
| (d) | statement that certain disclosures be disregarded (to follow)                                | <input type="checkbox"/>            |
| (e) | priority document (certified copy of earlier application)                                    | <input type="checkbox"/>            |
| (f) | cash, cheque, money order, banker's draft or postal order for the payment of application fee | <input checked="" type="checkbox"/> |
| (g) | other documents (specify) -  | <input type="checkbox"/>            |

IX. SIGNATURE:.....

*P. Kandiah*

**P. Kandiah**

**\*\* (Applicant/Agent)**

2/12/2003

(Date)


If Agent, indicates Agent's Registration No: **PA 90/019**

## For Official Use

1. Date application received:
2. Date of receipt of correction, later filed papers or drawings completing the application:

\* Delete whichever does not apply.

\*\* Type name under signature and delete whichever does not apply.

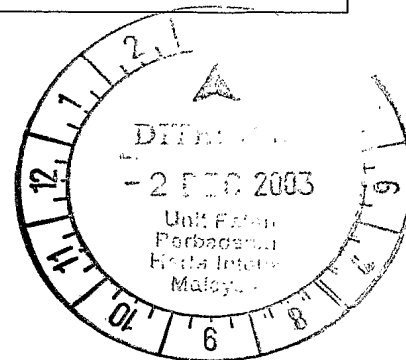

20034609

5     **A METHOD AND SYSTEM TO ELECTRONICALLY IDENTIFY AND VERIFY**  
      **AN INDIVIDUAL PRESENTING HIMSELF FOR SUCH IDENTIFICATION AND**  
          **VERIFICATION**

10     **Field of the Invention**

      The invention relates to providing security using the biometrics features of an individual. More particularly the invention relates to a method and system to electronically identify and verify an individual presenting himself for such identification and verification. The various types of biometrics features include but not limited to  
15    fingerprint, iris, retina scan and DNA. The invention can be incorporated in other systems, which require authentication of users.

**Description of Background Art**

20

      A person can be identified using his / her biometrics features. The biometrics features are generally unique to an individual and presence of two persons with similar biometrics features or a combination of biometrics features is rare and not unknown until today.

25

      One of the important requirements of the of the security systems using biometrics is that the data used for ensuring the identity, the biometrics features for biometrics, must not be capable of duplication by any means.

30

      But in present systems using card-based security, the data used to verify the identity is stored in the card itself and can be duplicated. The duplication of the card is made easy with the availability of the card copiers, a simple search for "Smart card copier" in the search engines such as [www.google.com](http://www.google.com) will provide many links and the resources for obtaining the copier tools.



5           When the data in the card is capable of duplication, the data can be also over-written or modified to control the access provided by the access control systems that are based on such cards.

10           There are many workarounds to prevent card duplication with the advancement of technologies, but at the same time, advancement is also made in technologies, such as card copier, risking the entire security infrastructure.

15           In case of biometrics, no special data is used or provided by the access control systems as compared to card-based systems. Instead the available data of the individual in form of biometrics features is used and such features are unique to the individual. Apart of the uniqueness, they should not be duplicated easily ensuring the effectiveness of the access control systems.

20           There are also methods available to duplicate the biometrics features. However the access control systems to shield against such attempts is rather impossible in case of card based systems. Some of the sensors that prevent the duplication of biometrics features are, but not limited to cell sensors and heat sensors.

25           The above sensors are available to prevent the duplication of biometrics features such sensors cannot be used in card based systems.

30           In case of security systems using biometrics, the features that are used for verification and identification must be secure enough to shield against attempts to swap entries between the individual (for example) all the stored database.

35           Hence the security of the biometrics features is highly important. An online method of verification and identification of the biometrics features is needed. In the online method the biometrics features are stored in a server and these features are entities that are used to decide the authenticity of the individuals.

5           With such security sensitiveness of the biometrics features, the said biometric features need to be stored in a server computer located in a secure environment and to use them for authenticity verification of the biometrics features of an individual.

10           During the authenticity verification, the biometrics features of the "person to be verified" is extracted and sent to the server and all the comparison takes place in the server only. One of the important advantages of this method is that the comparison takes place in a secured environment, as the server itself is located in a secure environment.

15           This method is completely in contrast with the existing technologies that do the verification locally that is, at the access point itself. Access Point is referred to as the security perimeter in the description.

The processes in the invention have the following components:

- 20           ➤ Access Point
- Client Software in the Access Point
- Biometrics Acquisition Devices attached or embedded to/with the Access Point
- Server Computer
- 25           ➤ Database Server Software in Server Computer
- Biometrics Server Software in Server Computer

30           Client software is a set of programs that reside at the Access Point that extracts the biometrics features from the "person to be verified" and transmits to the server for biometrics verification.

35           The biometrics acquisition devices are a set of computer hardware components that extract the biometrics raw data such as but not limited to fingerprint image in case fingerprint using fingerprint scanners, retina image in case of retina using retina scanners and iris image in case of iris using iris scanners.

5

The server computer is the computer hardware providing the computing platform for the database server and the biometrics server software. The server computer will be located in the secured environment.

10

The database server software is a set of computer software components that can be categorized or known as Relational Data Base Management System (RDBMS), Data Base Management System (DBMS), Object Relational Data Base Management System (ORDBMS). The examples of software systems are: Oracle® and Microsoft® SQL Server.

15

The biometrics server software is a set of computer software components that processes the biometrics features sent from the access point for registration or enrolment of the biometrics features and authentication of the biometrics features.

20 The authentication of the biometrics features can be categorized in two types, they are:

➤ Verification

25

This is a type of authentication in which the person to be verified is pre-determined using other types of identifications such as manual means or using an unique number allocated to the individual. In this type of authentication, the person is only verified to ensure that the person has the exactly the same biometrics features as the known individual.

30

➤ Identification

35

This is a type of authentication in which the person is identified using his/her biometrics features. In this type of authentication, the identification of the person is not pre-determined and the identification is solely based on the biometrics features.

5 **Summary of Invention**

A method of electronically identifying and verifying an individual utilising at least one biometric features of the individual is disclosed. The method includes the steps of activating an access apparatus with a means to capture at least one biometric feature of an individual in a secure manner using dynamic encryption, capturing the biometric feature of an individual wherein key features of biometric raw data are extracted, encrypting in a dynamic manner the biometric features, transmitting the encrypted data of the biometric feature to at least one server; and verifying the biometric features captured in the fruit step with a pre-stored biometric feature in the server.

15

Wherein upon positive identification and verification of the individual access is given to an auxiliary means such as but not limited to access to secured doors, database, computer network and servers. The server is either spatially separated from the access apparatus or is contained within the access apparatus. The encrypted data is transmitted to at least one server in the access apparatus or to at least one server spatially separated from the access apparatus.

20

In a first attempt the access apparatus will attempt to send the encrypted data to the spatially separated server. Upon detecting a failure in the first attempt, the access apparatus will in a second attempt send the encrypted data to any other designated server in a network, and wherein the designated servers are either servers spatially separated from the access apparatus or the servers in the access apparatus. Prior to any identification or verification of any individual, the individual is enrolled into a database by including the steps of imputing required particulars of the individual into the database and ascertaining the existence or otherwise of the particulars of the individual in the database, capturing the biometric features of the individual wherein key features of the biometric raw data are extracted, encrypting in a dynamic manner the biometric features, and transmitting the encrypted data of the biometric features to the server and storing the encrypted data in relation to the particulars of the individual obtained earlier. The particulars of the individual include alpha-numeral data, and / or images and / or binary

25

30

35

5 data wherein the binary data includes any representation capable of being stored in a binary form. At least one spatially separated server can be located outside the country. Further the server can be provided in a storage medium including a token or other device capable of recording data.

10 The identification of the individual is executed by comparing the biometric features of the individual captured with known biometric features of the individual previously captured and stored in a database and picked out from the database by the use of a unique personal identification number (PIN) allocated to the individual and to the records in the database. The method can be unfigured to be used without the use of PIN.

15 The biometric features of the individual to be identified and verified are stored in a server instead of in any storage medium held in possession by or issued to individual. The encrypted biometric features of the individual are processed by an biometric server software located at the server instead of at the point where the biometric features of an individual presenting for identification and verification are captured.

20

The invention further discloses an electronic means of identifying and verifying an individual presenting for such identification and verification including a means to capture at least one type of biometric features of the individual, a software means to encrypt in a dynamic manner the biometric features captured earlier, a transmission means wherein

25 the encrypted biometric features of the individual is transmitted to a server, a software means to capture the encrypted biometric features presented for identification and verification against stored encrypted biometric features of a purported individual, and a means to give access to other database or software if a positive identification and verification is made and to deny such access if a negative identification and verification is

30 made. An electronic means of identifying and verifying an individual as claimed in claim 15 wherein identifying the individual comprises of a PIN number for each stored encrypted biometric features of an individual, and a means to access the stored encrypted biometric features of an individual by the provision of a correct PIN number by an individual presenting for identification and verification and a means to compare the

- 5 captured biometric features of the individual with a given PIN number with the stored biometric features of the purported individual.

10 In another aspect the invention includes an access apparatus with a means to capture at least one biometric raw data of an individual in a secure manner using dynamic encryption, circuitry to extract any features of the biometric raw data from the means to capture the biometric raw data, circuitry to encrypt the key features of the biometric raw data in a dynamic manner, transmission means to transmit encrypted data of the biometric features to at least one server, at least one server to receive and store the encrypted data of the biometric feature of the individual, and circuitry to verify and / or identify the encrypted data against pre-stored encrypted biometric data in the server.

### **Brief Description of Drawings**

20 Figure 1 is a flow diagram of the process of enrollment of biometrics features to be used for verification and identification.

Figure 2 is a flow diagram of the process of verification of the biometrics features.

Figure 3 is a flow diagram of the process of identification of the biometrics features.

### **Overview**

25

The invention disclosed herein uses biometrics technology to verify and also to identify an individual online using his/her physical or behavioral traits. Types of "biometrics" methods include fingerprint scanning, iris scanning, retina scanning, handwriting analysis, hand print recognition and voice recognition. The invention may also use the combination of all or some "biometrics" technology.

30

The invention disclosed herein utilizes "biometrics" technology for identification of individual reliably in small and large database environments consuming less amount of time.

35

5           The invention disclosed herein uses database server components to store the  
biometrics features for verification and identification. The database server software is a  
set of computer software components that can be categorized or known as Relational Data  
Base Management System (RDBMS), Data Base Management System (DBMS), Object  
Relational Data Base Management System (ORDBMS). The examples of software  
10 systems are: Oracle® and Microsoft® SQL Server.

          The invention disclosed herein uses biometrics features stored in a server to  
identify and also to verify an individual using biometrics features that he/she currently  
has.

15

          The invention disclosed herein uses a biometrics server software in the server that  
processes, verifies and identifies an individual at the server instead of at the access point.

          The invention disclosed herein includes a method of enrolment of the biometrics  
20 features for new and unknown users through online methods.

          The invention uses biometrics acquisition devices for extracting the biometrics  
raw data of an individual.

25           The invention disclosed herein includes two methods of authentication of the  
biometrics features, they are verification and identification,

➤ Verification

30           This is a type of authentication in which the person to be verified is pre-  
determined using other types of identifications such as manual means or using an  
unique number allocated to the individual. In this type of authentication, the  
person is only verified to ensure that the person has the exactly the same  
biometrics features as the known individual.

35

5       ➤ Identification

10       This is a type of authentication in which the person is identified using his/her biometrics features. In this type of authentication, the identification of the person is not pre-determined and the identification is solely based on the biometrics features.

The invention disclosed herein can be used to avoid identity thefts and / or prevent unauthorized entry into computer networks or other electronic database systems.

15       The invention disclosed herein includes a step for encrypting the biometrics raw data extracted from the individual before they are sent to the server.

Figure 1

20       Figure 1, is a flow diagram of the process of online enrollment of biometrics features for new and/or unregistered users. These users are not known to the system and their information will be non-existent in the database.

The process involves the following components:

25

- Registration Terminal
- Client Software in the Registration Terminal
- Biometrics Acquisition Devices attached or embedded to/with the Registration Terminal
- 30       ➤ Server Computer
- Database Server Software in Server Computer
- Biometrics Server Software in Server Computer



5           The enrolment process is called as registration is carried out at the Registration Terminal that will relay the information to the server computer in a secured communication channel.

10           The server computer will be located in a physically secured location and will hold the database of user information along with their biometrics features. The biometrics features with the personal information are stored in the database upon receiving the relayed information from the Registration Terminal.

15           The database of personal information along with the biometrics features will be maintained at the server computer using one or more or all combinations of commonly used database software systems that can be categorized or known as Relational Data Base Management System (RDBMS), Data Base Management System (DBMS), Object Relational Data Base Management System (ORDBMS).

20           In the database system, the biometrics features will have to be stored along with personal information or they can be stored separately and linked using a common identifier. The identifier will be but not limited to a constant, system generated or any combination.

25           The server computer will also hold and execute the Biometrics Server Software that processes the enrolment request sent from the Registration Terminal. The biometrics server software is integrated with the Database System to store the biometrics features.

30           This process includes the enrolment of the personal information after its non-existence in the database is confirmed. The non-existence confirmation is carried out by searching for the identification number, personal name and other details of the personnel in the database. During the enrolment of the personal information a PIN is also allocated for the process mentioned in the Figure 2.

5           For the PIN allocation, all appropriate measures should be taken to prevent using an existent PIN resulting in PIN duplication. This prevention can be accomplished by searching the database using the "to be allocated PIN number" and if a match is found, the usage of that PIN can be prevented. However there are many other methods commonly available to avoid the duplication and they are all prior art.

10

          If the search was not successful and when no records exist related to the personnel, the personal details will have to be created. The process of registration of the personal information is prior art and commonly known method.

15           The process of online enrollment of biometrics features for new and/or unregistered users starts with the activation of the client software program at the Registration Terminal in step 101. The activation of the client component will be as a result of user interaction and his/her intent to enroll as a person.

20           The user at the Registration terminal should be an authorized personnel and is prior art.

          In the step 101, the existence of the personal details is verified and if not found, the details are created. The method for creation and verifying the existence of the  
25   personal details is prior art.

          Upon successful verification of the personal details, the process continues from the step 102 in which the biometrics acquisition device such as but not limited to Fingerprint scanners in case of fingerprint, Iris scanners in case of Iris and Retina  
30   Scanners in case of Retina, is activated from the client software.

          The activation step of the biometrics acquisition devices also includes recognizing the biometrics acquisition device, its connectivity and establishing of the communication channel. These steps are required for acquisition of the biometrics features from the

- 5 device and are provided by the driver software or the Software Development Kit provided by the Biometrics acquisition supplier.

However the driver software can be also developed using the technical specifications provided by the supplier. These methods are for the integration of the biometrics acquisition device with the software systems and are known technology and they are prior art.

If there is a failure in activation of the biometrics acquisition device, an informational message is displayed in step 102-D and the process terminates immediately at step 102-T.

15

Upon successful activation of the biometrics acquisition device in step 102, the process continues from the step 103 where acquisition of the biometrics raw data is carried out. The biometrics raw data is any of the following but not limited to fingerprint image in case of Fingerprint, Iris image in case of Iris, Retina image in case of Retina. The biometrics raw data type varies based on biometrics types used such as but not limited to Fingerprint, Iris, Retina and DNA.

In case of any failure in the step 103, the process displays an informational message to the user in the step 103-D and terminates at 103-T.

25

Upon successful acquisition of the biometrics raw data, validation of the biometrics raw data in the step 104 will be carried out. The validation of the biometrics raw data includes verification of the required characteristics presence on the biometrics raw data and the criteria for the required characteristics will vary based on the biometrics type such as but not limited to Iris, Fingerprint, and Retina. The list are required characteristics that should be present in the biometrics raw are commonly known and are prior art.

If the validation fails, the process displays an information message to the user in the step 104-D and terminates at 104-T.

35

5           However if the validation was successful, the process continues from step 105 where the biometrics raw data obtained at the step 103, is encrypted. The purpose of the encryption of the raw data is to secure the raw data from tampering and eavesdropping when it is sent to the server in step 106. The method of encryption will be selected based on the environment with the following factors taken into account:

10

- Computing power of the Registration Terminal
- Computing power of the Server computer
- Network bandwidth

15

The types of encryption include but not limited to 1) Asymmetric Encryption where keys used for encryption and/or decryption come in pairs and 2) Symmetric Encryption where the same key is used for Encryption and Decryption.

20           The type of encryption is also selected based on the operational issues. However the combination of the two types of encryption can also be used for added security with all the above factors taken into account.

25           Upon successful encryption of the biometrics raw data, in step 106, the biometrics raw data is sent to the Biometrics Server Software running at the Server Computer. As a requirement to this step, a communication channel will have to be established between the Server Computer and the Registration Terminal using the encryption as mentioned above.

30           The method of sending the biometrics raw data is by using TCP network protocol by connecting to a network port listening on the Server. The application protocol for the TCP will have to be selected automatically based on the above factors for encryption. The commonly used line-based application level protocol is recommended as used in FTP defined in RFC 959 available at the URL <http://www.ietf.org/rfc/rfc0959.txt?number=959> as of now.

5 In case of failure during sending the information to the server in step 106, the process will display an informational message in the step 106-D and terminates at 106-T.

Upon sending the biometrics data successfully to the Biometrics server software, the client software in the Registration terminal in the step 107, will wait for the response  
10 from the Server. The response will contain the status of the registration that will include but not limited to Success state and Failure State.

Finally in the step 108, the state of the registration sent by the Server (Failure or Success) is displayed to the user and the process terminates at step 109.

15

## Figure 2

Figure 2, is a flow diagram of the process of verification of biometrics features of an individual (user). The main requirement for this process is that the individual must be  
20 enrolled using the process mentioned in the Figure 1 and a unique PIN should be allocated. If the user is not enrolled, the enrolment process must be completed for this user before the user gets access in this process.

This process will be carried out at the following but not limited to access points, check points that use biometrics verification. The process can also be used in any area  
25 that requires biometrics verification with the server. The location of usage of this process is referred to as "Access Point" in this process.

The process involves the following components:

30

- Access Point
- Client Software in the Access Point
- Biometrics Acquisition Devices attached or embedded to/with the Access Point
- 35 ➤ Server Computer

- 5           ➤ Database Server Software in Server Computer
- Biometrics Server Software in Server Computer

The server computer will be located in a physically secured location and will hold the database of user information along with their biometrics features.

10

The database of personal information along with the biometrics features will be maintained at the server computer using one or more or all combinations of commonly used database software systems that can be categorized or known as Relational Data Base Management System (RDBMS), Data Base Management System (DBMS), Object  
15 Relational Data Base Management System (ORDBMS).

20

In the database system, the biometrics features will have to be stored along with personal information or they can be stored separately and linked using a common identifier. The identifier will be but not limited to a constant, system generated or any combinations.

25

The server computer will also hold and execute the Biometrics Server Software that processes the verification request sent from the Access Point. The biometrics server software is integrated with the Database System to access the registered biometrics  
25 features for verification.

30

The process of online verification of biometrics features starts with the activation of the client software program at the Access Point in step 201. The activation of the client component will be as a result of user interaction and his/her intent for verification.

35

Upon successful activation of the client component in the step 201, in step 202 the PIN or a unique number allocation to the individual is accepted from the user at the Access Point. The method of acceptance can be using a Graphical User Interface or manual methods. The client software in the Access Point should have this functionality to  
35 accept the number given by the user.

5           At this step the user must provide the exact number allocated at the process in the Figure 1. Providing the wrong number will result in verification failure.

          When a number is entered by the user, the process continues from step 203 at which the biometrics acquisition devices such as but not limited to Fingerprint scanners in  
10   case of fingerprint, Iris scanners in case of Iris and Retina Scanners in case of Retina, is activated from the client software.

          The activation step of the biometrics acquisition devices also includes recognizing the biometrics acquisition device, its connectivity and establishing of the communication  
15   channel. These steps are required for acquisition of the biometrics features from the device and are provided by the driver software or the Software Development Kit provided by the Biometrics acquisition device supplier.

          However the driver software can be also developed using the technical  
20   specifications provided by the supplier. These methods are for the integration of the biometrics acquisition device with the software systems and are known technology and they are prior art.

          If there is a failure in activation of the biometrics acquisition device, an  
25   informational message is displayed in step 203-D and the process terminates immediately at step 203-T.

          Upon successful activation of the biometrics acquisition device in step 203, the process continues from step 204 where acquisition of the biometrics raw data is carried  
30   out. The biometrics raw data is any of the following but not limited to fingerprint image in case of Fingerprint, Iris image in case of Iris, Retina image in case of Retina. The biometrics raw data type varies based on biometrics types used such as but not limited to Fingerprint, Iris, Retina and DNA.

5           In case of any failure in the step 204, the process displays an informational message to the user in the step 204-D and terminates at 204-T.

          Upon successful acquisition of the biometrics raw data, the validation of the biometrics raw data in step 205 is carried out. The validation of the biometrics raw data  
10 includes verification of the required characteristics present on the biometrics raw data and the criteria for the required characteristics will vary based on the biometrics type such as but not limited to Iris, Fingerprint, and Retina. The list of required characteristics that should be present in the biometrics raw are commonly known and are prior art.

15           If the validation fails, the process displays an information message to the user in the step 205-D and terminates at 205-T.

          However if the validation was successful, the process continues from the step 206 where the biometrics raw data obtained at the step 204, is encrypted. The purpose of the  
20 encryption of the raw data is to secure the raw data from tampering and eavesdropping when it is sent to the server in the step 207. The method of encryption will be selected based on the environment with the following factors taken into account:

- Computing power of the Registration Terminal
- 25           ➤ Computing power of the Server computer
- Network bandwidth

          The types of encryption include but not limited to 1) Asymmetric Encryption where keys used for encryption and/or decryption come in pairs and 2) Symmetric  
30 Encryption where the same key is used for Encryption and Decryption.

          The type of encryption is also selected based on operational issues. However the combination of the two types of encryption can also be used for added security with all the above factors taken into account.



5        Upon successful encryption of the biometrics raw data, in step 207, the biometrics raw data is sent to the Biometrics Server Software running at the Server Computer. As a requirement to this step, a communication channel will have to be established between the Server Computer and the Registration Terminal using the encryption as mentioned above.

10       The method of sending the biometrics raw data will be using TCP network protocol by connecting to a network port listening on the Server. The application protocol for the TCP will have to be selected automatically based on the above factors for encryption. The commonly used line-based application level protocol is recommended as used in FTP defined in RFC 959 available at the URL  
 15       <http://www.ietf.org/rfc/rfc0959.txt?number=959> as of now.

In case of failure during sending the information to the server in step 207, the process will display an informational message in the step 207-D and terminates at 207-T.

20       Upon sending the biometrics data successfully to the Biometrics server software, the client software in the Registration terminal in the step 208, will wait for the response from the Server. The response will contain the status of the registration that will include but not limited to Success state and Failure State.

If the success state is sent by the server in the step 208, the client software will display  
 25       the Personal information sent by the server in step 209. The information includes but not limited to:

- National ID Number (IC No.)
- Name
- 30.       ➤ Photograph

But in case of failure state in the step 208, an informational message will be displayed to the user in the step 208-D and the process will be restart from the step 201.

5           With the success state in the step 208 and after displaying the information in the step 209, the process will continue from step 210 where the required access control actions such as but not limited to permitting access to other accounts, database, activating the door (attached to the access point), opening the gate (attached to the access point) will be carried out.

10

          The commonly used method of the activating a door, for example, is by sending a set of alphabetic characters such as "ABCDEFGH" to the serial port such as COM1 or COM2 (based on the configuration) that generates the electronic signal enough to trigger the lock mechanism. However such methods are known technology and are prior art.

15

          Finally the process will terminate at the step 211.

Figure 3

20       Figure 3, is a flow diagram of the process of identification of biometrics features of an individual (user). The main requirement for this process is that the individual must be enrolled using the process mentioned in the Figure 1. If the user is not enrolled, the enrolment process must be completed for this user before the user gets access in this process.

25

          This process will be carried out at the following but not limited to access points, check points that use biometrics identification. The process can also be used in any area that requires biometrics identification with the server. The location of usage of this process is referred to as "Access Point" in this process.

30

          The process involves the following components:

- Access Point
- Client Software in the Access Point

- 5
- Biometrics Acquisition Devices attached or embedded to/with the Access Point
  - Server Computer
  - Database Server Software in Server Computer
  - Biometrics Server Software in Server Computer

10

The server computer will be located in a physically secured location and will hold the database of user information along with their biometrics features.

15 The database of personal information along with the biometrics features will be maintained at the server computer using one or more or all combinations of commonly used database software systems that can be categorized or known as Relational Data Base Management System (RDBMS), Data Base Management System (DBMS), Object Relational Data Base Management System (ORDBMS).

20 In the database system, the biometrics features will have to be stored along with personal information or they can be stored separately and linked using a common identifier. The identifier will be but not limited to a constant, system generated or any combinations.

25 The server computer will also hold and execute the Biometrics Server Software that processes the verification request sent from the Access Point. The biometrics server software is integrated with the Database System to access the registered biometrics features for verification.

30 The process of online identification of biometrics features for starts with the activation of the client software program at the Access Point in step 301. The activation of the client component will be as a result of user interaction and his/her intent for identification.

5           Upon successful activation of the client component in the step 301, the process continues from the step 302 at which the biometrics acquisition devices such as but not limited to Fingerprint scanners in case of fingerprint, Iris scanners in case of Iris and Retina Scanners in case of Retina, is activated from the client software.

10           The activation step of the biometrics acquisition devices also includes recognizing the biometrics acquisition device, its connectivity and establishing of the communication channel. These steps are required for acquisition of the biometrics features from the device and are provided by the driver software or the Software Development Kit provided by the Biometrics acquisition supplier.

15           However the driver software can be also developed using the technical specifications provided by the supplier. These methods are for the integration of the biometrics acquisition device with the software systems and are known technology and they are prior art.

20           If there is a failure in activation of the biometrics acquisition device, an informational message is displayed in step 302-D and the process terminates immediately at step 302-T.

25           Upon successful activation of the biometrics acquisition device in step 302, the process continues from the step 303 where acquisition of the biometrics raw data is carried out. The biometrics raw data is any of the following but not limited to fingerprint image in case of Fingerprint, Iris image in case of Iris, Retina image in case of Retina. The biometrics raw data type varies based on biometrics types used such as but not  
30           limited to Fingerprint, Iris, Retina and DNA.

          In case of any failure in the step 303, the process displays an informational message to the user in the step 303-D and terminates at 303-T.

5           The successful acquisition of the biometrics raw data follows the validation of the  
biometrics raw data in the step 304. The validation of the biometrics raw data includes  
verification of the required characteristics presence on the biometrics raw data and the  
criteria for the required characteristics will vary based on the biometrics type such as but  
not limited to Iris, Fingerprint, and Retina. The list are required characteristics that should  
10 be present in the biometrics raw are commonly known and are prior art.

If the validation fails, the process displays an information message to the user in  
the step 304-D and terminates at 304-T.

15           However if the validation was successful, the process continues from the step 305  
where the biometrics raw data obtained at the step 305, is encrypted. The purpose of the  
encryption of the raw data is to secure the raw data from tampering and eavesdropping  
when it is sent to the server in the step 306. The method of encryption will be selected  
based on the environment with the following factors taken into account:

20

- Computing power of the Registration Terminal
- Computing power of the Server computer
- Network bandwidth

25           The types of encryption include but not limited to 1) Asymmetric Encryption  
where keys used for encryption and/or decryption come in pairs and 2) Symmetric  
Encryption where the same key is used for Encryption and Decryption.

30           The type of encryption is also selected based on the operational issues, however  
the combination of the two types of encryption can also be used for added security with  
all the above factors taken into account.

35           Upon successful encryption of the biometrics raw data, in the step 306, the  
biometrics raw data is sent to the Biometrics Server Software running at the Server  
Computer. As a requirement to this step, a communication channel will have to be

- 5 established between the Server Computer and the Registration Terminal using the encryption as mentioned above.

The method of sending the biometrics raw data will be using TCP network protocol by connecting to a network port listening on the Server. The application protocol  
10 for the TCP will have to be selected automatically based on the above factors for encryption. The commonly used line-based application level protocol is recommended as used in FTP defined in RFC 959 available at the URL <http://www.ietf.org/rfc/rfc0959.txt?number=959> as of now.

- 15 In case of failure during sending the information to the server in step 306, the process will display an informational message in the step 306-D and terminates at 306-T.

Upon sending the biometrics data successfully to the Biometrics server software, the client software in the Registration terminal in the step 307, will wait for the response  
20 from the Server. The response will contain the status of the registration that will include but not limited to Success state and Failure State.

If the success state is sent by the server in the step 307, the client software will display the Personal information sent by the server in step 308. The information includes  
25 but not limited to:

- National ID Number (IC No.)
- Name
- Photograph

30

But in case of failure state in the step 307, an informational message will be displayed to the user in the step 307-D and the process will be restart from the step 301.

With the success state in the step 307 and after displaying the information in the  
35 step 308, the process will continue from the step 309 where the required access control

5 actions such as but not limited to activating the door (attached to the access point), opening the gate (attached to the access point) will be carried out.

The commonly used method of the activating the door, for example, is by sending a set of alphabetic characters such "ABCDEFGH" to the serial port such as COM1 or  
10 COM2 (based on the configuration) that generates the electronic signal enough to trigger the lock mechanism. However such methods are known technology and are prior art.

Finally the process will terminate at the step 310.

### 15 Example

The invention as disclosed can be incorporated in several electronic systems where it is necessary to authenticate an individual designing to gain access to an electronic network such as ATM network point of sale (POS) counters and security  
20 access control system.

Where the system is incorporated in any ATM network the access apparatus is the ATM itself with either an incorporated biometric sensor device or biometric sensor device installed independently of the ATM but electronically / electrically linked to the ATM.

25 The server containing the circuitry to store the encrypted biometric features can be:

- (i) a server spatially distanced from the access apparatus;
- (ii) a server spatially distanced from the access apparatus and a server installed within the access apparatus itself; and
- (iii) a plurality of servers spatially distanced from the access apparatus with or  
30 without servers at the access apparatus.

The provision of more than one server containing the encrypted biometric feature is necessary as a safety feature to ensure that if communication / transmission between a predesignated server is not possible, authentication can still be done at the other server.

- 5 This 'back up' system is absolutely essential where the system is incorporated in a door access system (to ensure that no one individual) is locked out / in an enclosed premise.

- It will be evident from the description, that the use of a token is optional. The access apparatus can be activated by the keying in of a PIN and thereafter the verification  
10 and identification process is initiated.

**An Illustration of the invention using a sample code segment**

- The processes detailed above are explained below using the "C" Language code  
15 segments. The function referred are have the functions based on their names.



## 5 Enrollment:

```
/* start the enrollment processing */

if (!Personnel_Exists()) {
    Create_Personnel();
}

if (!Activate_Biometrics_Device()) {
    Display_Error_Message();
    Stop_Process();
}

if (!Acquire_Biometrics_Raw_Data()) {
    Display_Error_Message();
    Stop_Process();
}

if (!Validate_Biometrics_Raw_Data()) {
    Display_Error_Message();
    Stop_Process();
}

Encrypt_Biometrics_Raw_Data();

If (!Send_Encrypted_Data_To_Server()) {
    Display_Error_Message();
    Stop_Process();
}

if (Response_From_Server() != "OK") {
    Display_Error_Message();
    Stop_Process();
}

Display_OK_Message();
Stop_Process();
```

## 5 Verification:

```
int PIN = 0;

/* start the verification processing */
Activate_Client_Component();

PIN = Get_PIN();

if (!Activate_Biometrics_Device()) {
    Display_Error_Message();
    Stop_Process();
}

if (!Acquire_Biometrics_Raw_Data()) {
    Display_Error_Message();
    Stop_Process();
}

if (!Validate_Biometrics_Raw_Data()) {
    Display_Error_Message();
    Stop_Process();
}

Encrypt_Biometrics_Raw_Data();

If (!Send_Encrypted_Data_To_Server()) {
    Display_Error_Message();
    Stop_Process();
}
```

## 5 Identification:

```
/* start the verification processing */
Activate_Client_Component();

if (!Activate_Biometrics_Device()) {
    Display_Error_Message();
    Stop_Process();
}

if (!Acquire_Biometrics_Raw_Data()) {
    Display_Error_Message();
    Stop_Process();
}

if (!Validate_Biometrics_Raw_Data()) {
    Display_Error_Message();
    Stop_Process();
}

Encrypt_Biometrics_Raw_Data();
If (!Send_Encrypted_Data_To_Server()) {
    Display_Error_Message();
    Stop_Process();
}

if (Response_From_Server() != "OK") {
    Display_Error_Message();
}
```

The functions in the above sample code segments will have to use the global variables to exchange the information between the functions.

## CLAIMS

1. A method of electronically identifying and verifying an individual utilising at least one biometric features of the individual including the steps of:
  - 10 (i) activating an access apparatus with a means to capture at least one biometric feature of an individual in a secure manner using dynamic encryption;
  - (ii) capturing the biometric feature of an individual wherein key features of biometric raw data are extracted;
  - (iii) encrypting in a dynamic manner the biometric features;
  - 15 (iv) transmitting the encrypted data of the biometric feature to at least one server; and
  - (v) verifying the biometric features captured in step (i) with a pre-stored biometric feature in the server in step (iv).
- 20 wherein upon positive identification and verification of the individual access is given to an auxiliary means such as but not limited to access to secured doors, database, computer network and servers.
2. A method of electronically identifying and verifying an individual as claimed in claim  
25 1 wherein the server is either spatially separated from the access apparatus or is contained within the access apparatus.
3. A method electronically identifying and verifying an individual as claimed in claim 1  
30 wherein in step (iv) the encrypted data is transmitted to at least one server in the access apparatus or to at least one server spatially separated from the access apparatus.
4. A method of electronically identifying and verifying an individual as claimed in claim  
35 3 wherein in a first attempt the access apparatus will attempt to send the encrypted data to the spatially separated server.

20034609

- 2 DEC 2003

5

5. A method of electronically identifying and verifying an individual as claimed in claim 3 wherein upon detecting a failure in the first attempt claim 4 the access apparatus will in a second attempt send the encrypted data to any other designated server in a network.

10

6. A method of electronically identifying and verifying an individual as claimed in claim 5 wherein the designated servers are either servers spatially separated from the access apparatus or the servers in the access apparatus.

15

7. A method of electronically identifying and verifying an individual as claimed in claim 1 wherein prior to and independent of step (i) of claim 1 the individual is enrolled into a database by including the steps of:

20

- (i) imputing required particulars of the individual into the database and ascertaining the existence or otherwise of the particulars of the individual in the database;
- (ii) capturing the biometric features of the individual wherein key features of the biometric raw data are extracted
- (iii) encrypting in a dynamic manner the biometric features, and
- (iv) transmitting the encrypted data of the biometric features to the server and storing the encrypted data in relation to the particulars of the individual obtained in step (i) above.

25

30

8. A method of electronically identifying and verifying an individual as claimed in claim 1 wherein particulars in step (i) of claim 7 includes alpha-numeral data, and / or images and / or binary data wherein the binary data includes any representation capable of being stored in a binary form.

35

9. A method of electronically identifying and verifying an individual as claimed in claim 7 wherein at least one spatially separated server is located outside the country.

- 5 10. A method of electronically identifying and verifying an individual as claimed in claim  
1 wherein the server is provided in a storage medium including a token or other  
device capable of recording data.
- 10 11. A method of electronically identifying and verifying an individual as claimed in claim  
1 wherein the identification of the individual is executed by comparing the biometric  
features of the individual captured in step (ii) of claim 1 with known biometric  
features of the individual previously captured and stored in a database and picked out  
from the database by the use of a unique personal identification number (PIN)  
allocated to the individual and to the records in the database.
- 15 12. A method of electronically identifying and verifying an individual as claimed in claim  
1 wherein the identification of the individual is executed by comparing the biometric  
features of the individual captured in step (ii) of claim 1 with known biometric  
features of the individual previously captured and stored in the database without the  
20 use of any PIN numbers.
- 25 13. A method of electronically identifying and verifying an individual as claimed in claim  
1 wherein the biometric features of the individual to be identified and verified are  
stored in a server instead of in any storage medium held in possession by or issued to  
individual.
- 30 14. A method of electronically identifying and verifying an individual as claimed in claim  
1 wherein the encrypted biometric features of the individual are processed by an  
biometric server software located at the server instead of at the point where the  
biometric features of an individual presenting for identification and verification are  
captured.
- 35 15. An electronic means of identifying and verifying an individual presenting for such  
identification and verification including:

- 5 (i) a means to capture at least one type of biometric features of the individual;  
(ii) a software means to encrypt in a dynamic manner the biometric features captured in (i);  
(iii) a transmission means wherein the encrypted biometric features of the individual is transmitted to a server;  
10 (iv) a software means to capture the encrypted biometric features presented for identification and verification against stored encrypted biometric features of a purported individual; and  
(v) a means to give access to other database or software if a positive identification and verification is made and to deny such access if a negative identification and  
15 verification is made.

16. An electronic means of identifying and verifying an individual as claimed in claim 15 wherein identifying the individual comprises of:

- 20 a PIN number for each stored encrypted biometric features of an individual; and  
a means to access the stored encrypted biometric features of an individual by the provision of a correct PIN number by an individual presenting for identification and verification and a means to compare the captured biometric features of the individual with a given PIN number with the stored biometric features of the purported  
25 individual.

17. A method of electronically identifying and verifying an individual as claimed in claim 1 wherein the biometric features include finger print, retina scan, iris scan or any other unique biometric features capable of being captured by sensors.

30

18. An electronic means of identifying and verifying an individual as claimed in claim 15 wherein the biometric features includes finger print, retina scan, iris scan or any other unique biometric feature capable of being captured by sensors.

5 19. An electronic means of identifying and verifying an individual presenting for such identification and verification including:

- (i) access apparatus with a means to capture at least one biometric raw data of an individual in a secure manner using dynamic encryption;
- 10 (ii) circuitry to extract any features of the biometric raw data from the means to capture the biometric raw data;
- (iii) circuitry to encrypt the key features of the biometric raw data in a dynamic manner;
- (iv) transmission means to transmit encrypted data of the biometric features to at least one server;
- 15 (v) at least one server to receive and store the encrypted data of the biometric feature of the individual; and
- (vi) circuitry to verify and / or identify the encrypted data against pre-stored encrypted biometric data in the server.

20

20. An electronic means of identifying and verifying an individual as claimed in claim 19 wherein the server is either spatially separated from the access apparatus or is contained within the access apparatus.

25 21. An electronic means of identifying and verifying an individual as claimed in claim 19 includes circuitry of transmission of encrypted biometric data to a pre-designated server fails, the encrypted biometric data is routable to at least one other designated server in an pre-designated sequence.

30 22. An electronic means of identifying and verifying an individual as claimed in claim 1 wherein a token encoding data unique to the individual presenting for identification and verification has to be introduced into the access apparatus before the biometric feature of the individual is captured.

200346 09

2 DEC 2004



- 5     23. An electronic means of identifying and verifying an individual as claimed in claim 1  
      wherein the biometric data of an individual is stored in a encrypted manner in server  
      and in any tokens if used.
- 10    24. An electronic means of identifying and verifying an individual as claimed in claim 1  
      wherein the means requires the introduction of a personal identification number (PIN)  
      of an individual presenting for identification and verification into the access  
      apparatus.

200346 091

- 2 DEC 2003

5     **A METHOD AND SYSTEM TO ELECTRONICALLY IDENTIFY AND VERIFY  
AN INDIVIDUAL PRESENTING HIMSELF FOR SUCH IDENTIFICATION AND  
VERIFICATION**

**ABSTRACT**

10

A method and a system of electronically identifying and verifying an individual utilising at least one biometric features of the individual is disclosed. The method includes the steps of activating an access apparatus with a means to capture at least one biometric feature of an individual in a secure manner using dynamic encryption,  
15 capturing the biometric feature of an individual wherein key features of biometric raw data are extracted, encrypting in a dynamic manner the biometric features, transmitting the encrypted data of the biometric feature to at least one server; and verifying the biometric features captured in the fruit step with a pre-stored biometric feature in the server. Wherein upon positive identification and verification of the individual access is  
20 given to an auxiliary means such as but not limited to access to secured doors, database, computer network and servers.

**FIG 1**

FIGURE 1


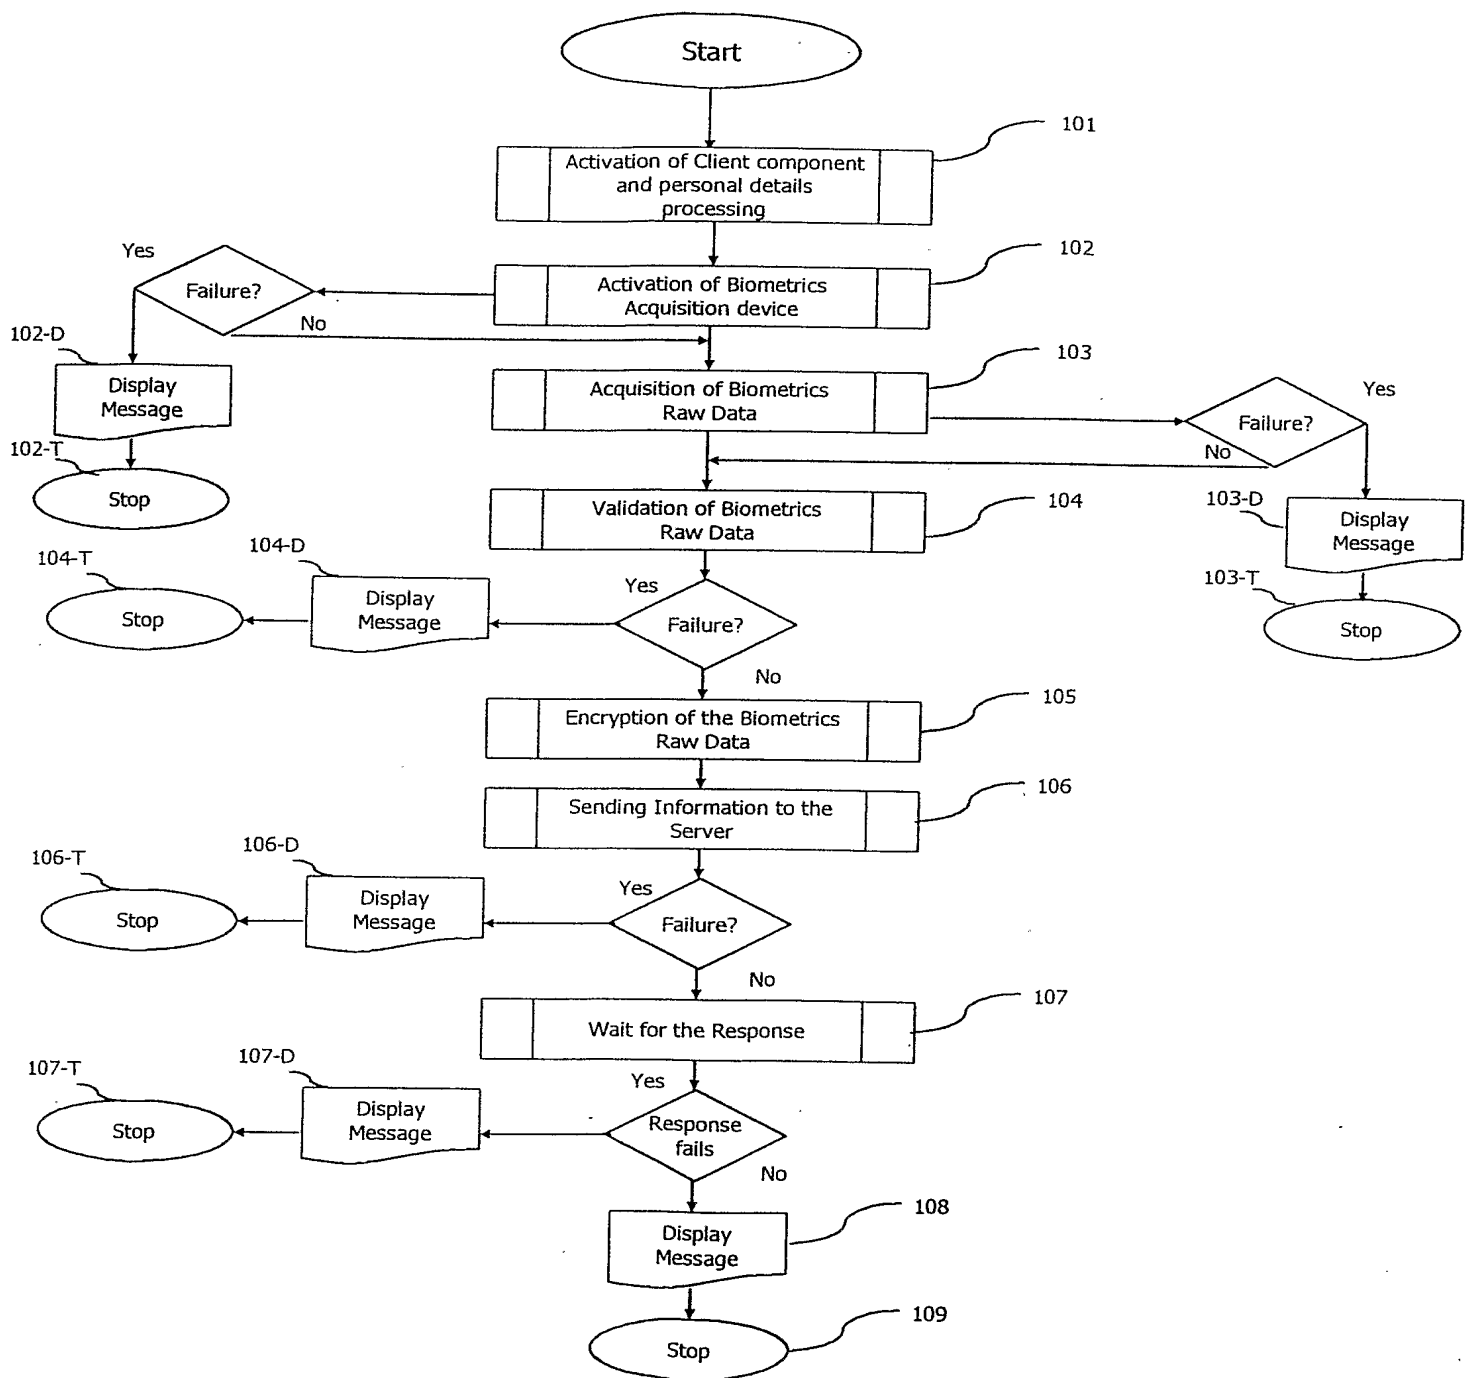


FIGURE 2

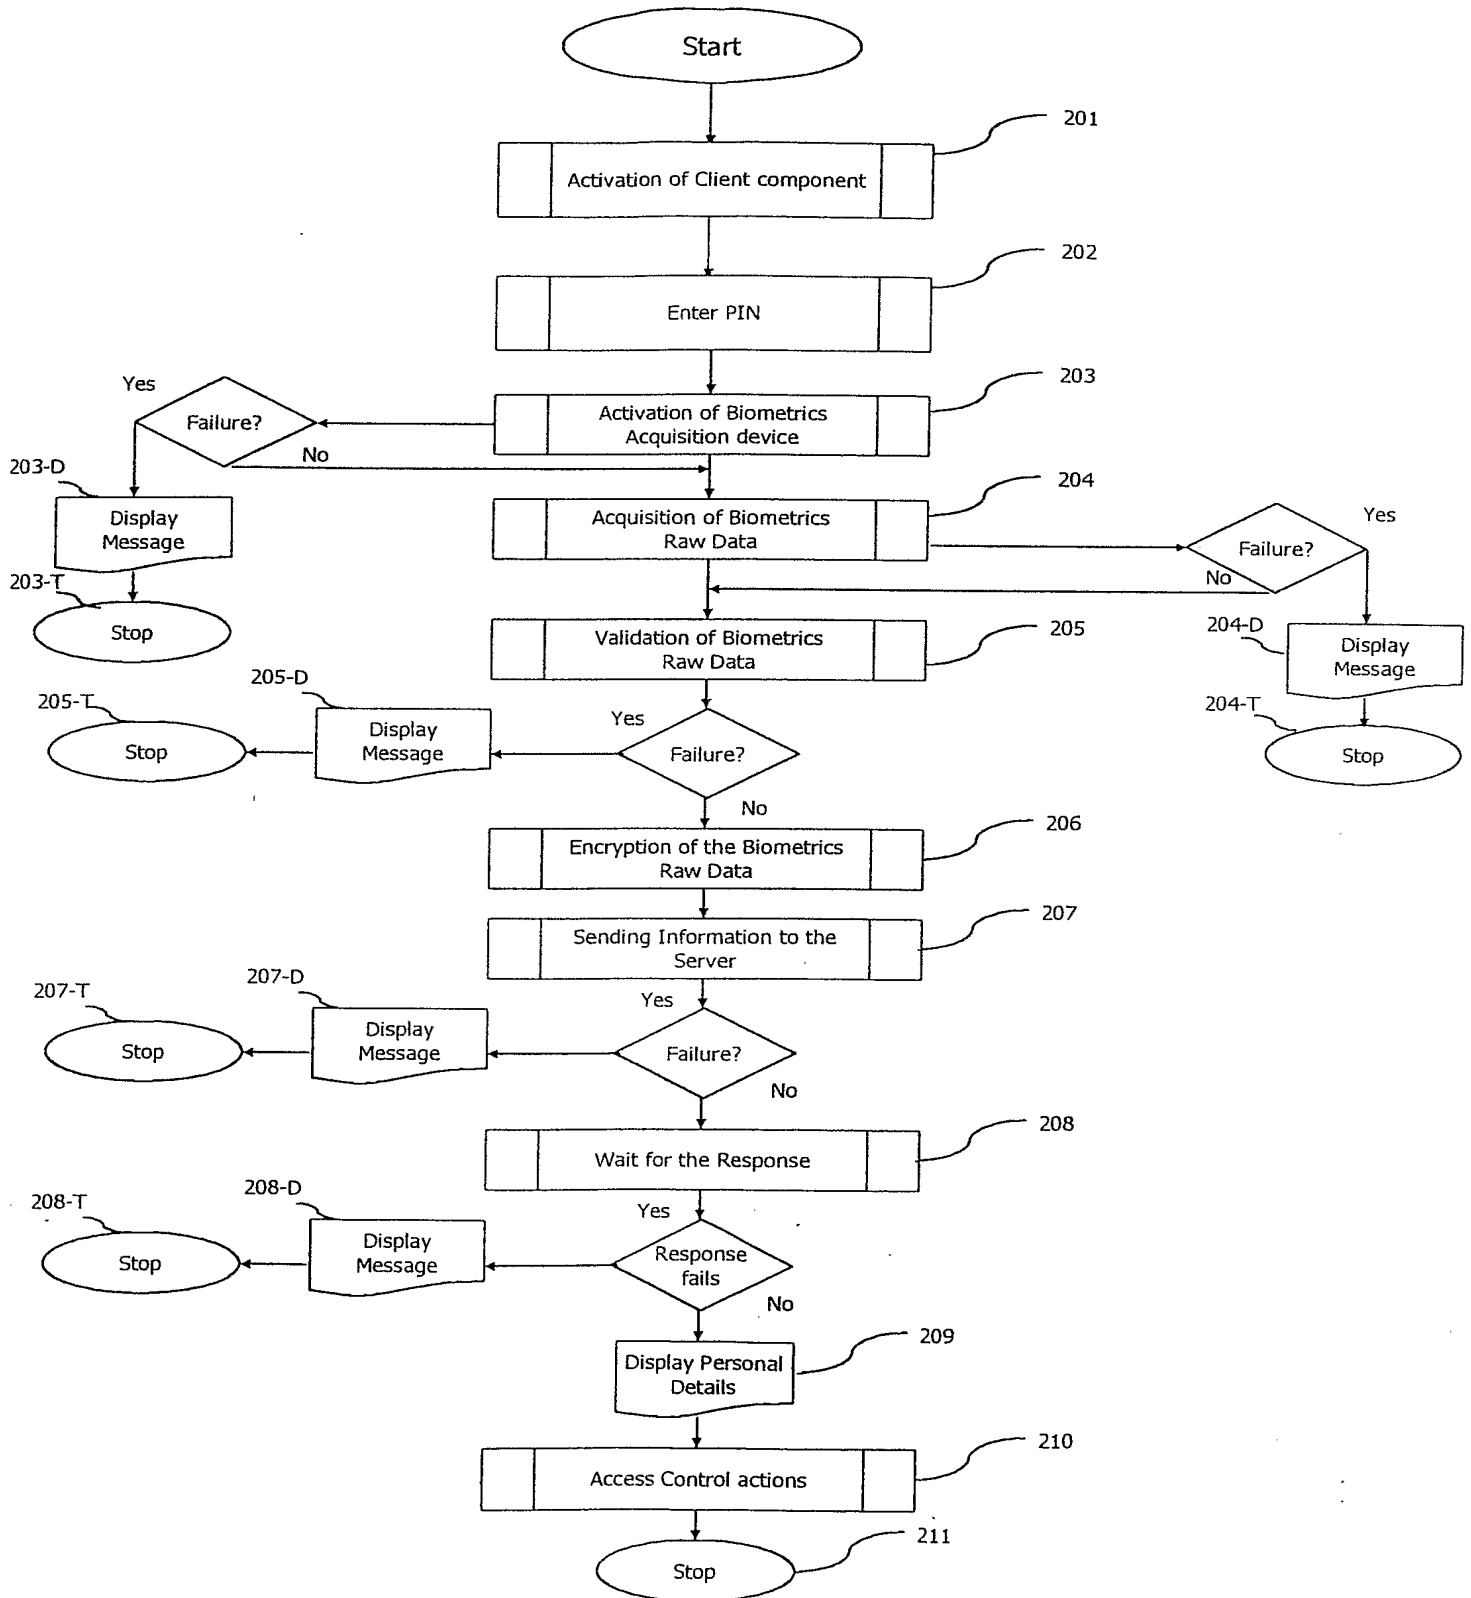

200346 09

- 2 DEC 2003

FIGURE 3

